Position n°

Daily production up to 47 kg



• Available dice size





Application fields



• Features & Plus

- Full cube, compact and crystalline
- Extrernal structure AISI 304 Scotch Brite
- Side grilles for better ventilation
- Removable side panels
- Electromechanical functionning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Cleaning system
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C
- Adjustable Stainless Steel feet
- Undercounter model


• Prod. 24h

| Air temp. | Water temp. | Prod. 24h kg |
|-----------|-------------|--------------|
| 10° C | 7° C | 47 |
| 21° C | 15° C | 45 |
| 32° C | 21° C | 38 |





Self-contained ice maker - Spayer system Daily production up to 47 kg

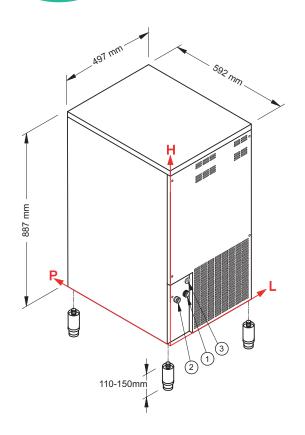

Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- 1 Water inlet: 129 mm - 132 mm - 3/4"
- 2 Water outlet: 56 mm - 154 mm - 24 mm
- ③ Electrical connection: 94 mm - 202 mm

Working conditions

- Location: Indoor

| | Min | Max |
|----------------------|---------------|---------------|
| Ambient temperature | +10° C | +43° C |
| Water temperature | +3° C | +32° C |
| Voltage | -10% | +10% |
| Water inlet pressure | 1bar (14 psi) | 6bar (84 psi) |

• Technical information

| Production in 24h | 45 kg | |
|--------------------------|--|--|
| Store capacity, up to | 25 kg | |
| Cooling system | A - W | |
| Kind of cube | 17 g | |
| Refrigerant | R290 | |
| Standard voltage | 220-240 V ~ 50 Hz | |
| Electrical consumption | 460 W | |
| Fuse | 10 A | |
| Water consumption | A: 4 l/kg | |
| | W: 15 l/kg | |
| Sizes (L-P-H mm) | 497 - 592 - 887 | |
| Sizes with pack (L-P-H r | mm) 550 - 660 - 1060 | |
| Net weight | 55 kg | |
| Gross weight | 64 kg | |
| Finish | AISI 304 stainless steel, scotch brite | |

All the technical information must be considered at the following conditions:



Sizes without feet Cube (17 g)

Standard

Ambient temperature +21° C



Water temperature +15° C



Electrical consumptionat +43° C (standard voltage)

Models and specifications are subject to change without notice Rev. 01 - Issued September 2019