



High-precision Temperature Control

- The digital temperature display can indicate operating status clearly;
- The high-precision microcomputer temperature control system enables users to set the temperature inside the cabinet within a range from -10°C to -25°C.



Temperature Data Storage

Standard with USB interface, the minimum storage interval is 1 minute. It can record 100,000 sets of data, records before more than 100,000 sets of data are automatically overwritten.



Refrigeration System

- The environmentally friendly Freon-free refrigerant and high-efficiency enclosed compressor supplied by a famous brand can ensure energy saving and low noise;
- The condenser installed on the bottom ensures temperature stability and system reliability;
- The CFC-free polyurethane foam technology and the thicker insulating layer can improve the effect of thermal insulation.



Alarm system

- The well-developed audible & visual alarm system makes it safer for storage;
- Equipped with alarm functions including high/low temperature alarm, sensor failure alarm, power failure alarm, low battery alarm, door ajar alarm, recorder failure etc;
- The turn-on delay and stopping interval protection function can ensure reliability in running;
- The door is equipped with a lock, improving security of sample storage.




Human-oriented

- The arc angle-shaped door frame and cabinet design makes its appearance more attractive;
- The built-in door gasket is dustproof and easy to clean;
- Each of the refrigerating chamber and the freezing chamber is equipped with 6 drawers, which are convenient for storage of samples.



Scope of Application

Suitable for freezing of ice bars and storage of various things needing refrigerated storage such as blood plasma, reagent, etc. Suitable for use in hospitals, clinics, health and disease prevention systems, blood banks, laboratories in colleges & universities, the frozen food industry and catering industry, etc.

Performance Data / Cooling Curve

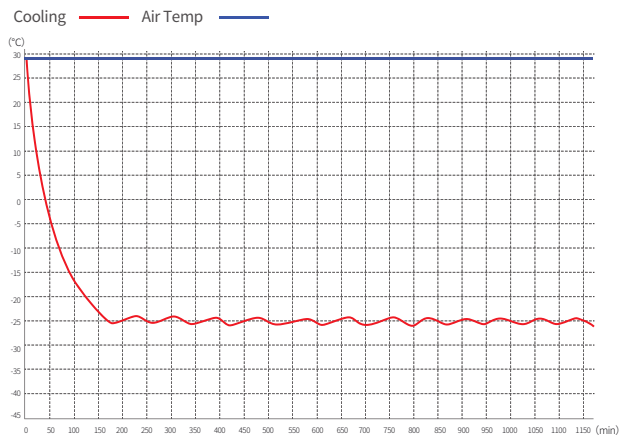

External Dimension



Specification Chart

-25°C Biomedical Freezer	
Model	DW-YL450
Cabinet Type	Upright
Capacity(L)	450
Internal Size(W*D*H)mm	(650*570*627)*2
External Size(W*D*H)mm	810*735*1960
Package Size(W*D*H)mm	895*820*2135
NW/GW(Kgs)	136/165
Performance	
Temperature Range	-10~-25°C
Ambient Temperature	16~32°C
Cooling Performance	-25°C
Climate Class	N
Controller	Microprocessor
Display	Digital display
Refrigeration	
Compressor	2pcs
Cooling Method	Direct cooling
Defrost Mode	Manual
Refrigerant	R600a
Insulation Thickness(mm)	80
Construction	
External Material	PCM
Inner Material	Sprayed aluminum plate
Drawers	12 (ABS)
Door Lock with Key	Yes
Door	2
Access Port	2pcs. Ø 25 mm
Casters	4 (2 casters with brakes)
Data Logging/Interval/Memory capacity	USB/Record every 10 minutes/100,000 data
Backup Battery	Yes
Alarm	
Temperature	High/Low temperature, High ambient temperature
Electrical	Power failure, Low battery
System	Sensor failure, Built-in USB datalogger failure, Door ajar , Main board communication error
Electrical	
Power Supply(V/HZ)	220-240~/50
Power(W)	206
Power Consumption(KWh/24h)	2.24
Rated Current(A)	1.9
Accessories	
Standard	RS485, Remote alarm contact

*The model, parameters and performance specified in this brochure may be changed without prior notice because of product upgrading.

*There may be differences between the product images shown in this brochure and the actual products. When you are buying any product, please check the actual product.