

SL 180




FROZEN DICE

Self-contained ice maker - Sprayer system
Daily production up to 98 kg

• Position n°



• Available dice size

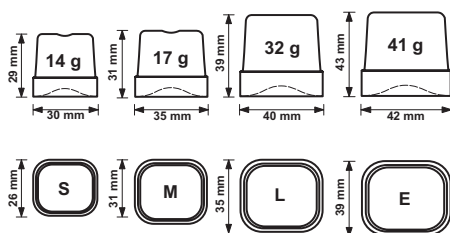

• Application fields

Hotel	●●●●●●●●	Fish market	●●●●●●●●
Restaurant	●●●●●●●●	Supermarket	●●●●●●●●
Fast food	●●●●●●●●	SPA	●●●●●●●●
Bar	●●●●●●●●	Medical	●●●●●●●●
Disco	●●●●●●●●	Industry	●●●●●●●●

• Features & Plus

- Full cube, compact and crystalline
- External structure AISI 304 Scotch Brite
- Side grilles for better ventilation
- Removable side panels
- Electromechanical functioning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C
- External protective filter, removable, easy to clean
- Adjustable Stainless Steel feet

• Prod. 24h


Air temp.	Water temp.	Prod. 24h kg
10° C	10° C	98
21° C	15° C	88
32° C	21° C	75

SL 180



FROZEN DICE

Self-contained ice maker - Sprayer system
Daily production up to 98 kg

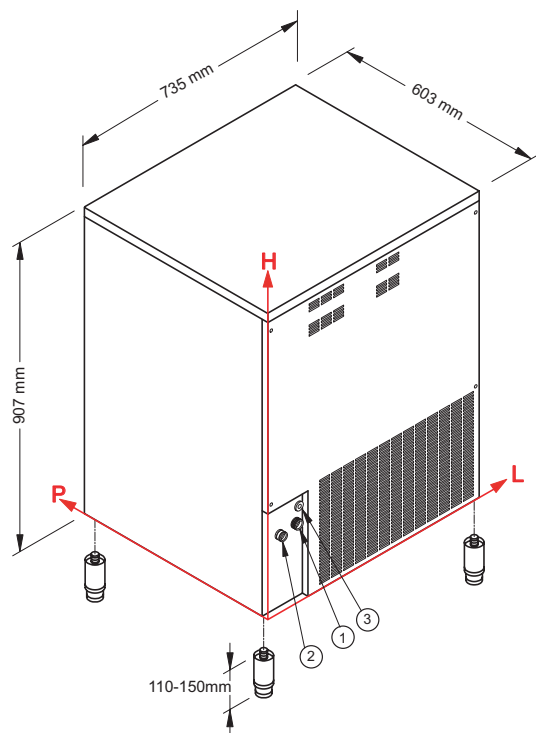

• Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet:
126 mm - 180 mm - 3/4"
- ② Water outlet:
61 mm - 246 mm - 24 mm
- ③ Electrical connection:
126 mm - 280 mm

• Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

• Technical information

Production in 24h	88 kg
Store capacity, up to	40 kg
Cooling system	A - W
Kind of cube	14-17-32-41 g
Refrigerant	R404A - R452A
Standard voltage	220-240 V ~ 50 Hz
Electrical consumption	800 W
Fuse	10 A
Water consumption	A: 2,5 l/kg W: 14,2 l/kg
Sizes (L-P-H mm)	735 - 603 - 907
Sizes with pack (L-P-H mm)	780 - 640 - 1085
Net weight	71 kg
Gross weight	83 kg
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered
at the following conditions:

Sizes without feet	Standard Cube (17 g)	Ambient temperature +21° C	Water temperature +15° C	Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice
Rev. 02 - Issued September 2019